

# complete


## Insulated loft ladder with wooden frame

### Advantages:

- proofed according to DIN EN 14975 (2009)
- insulated loft ladder with insulated lid of 33 mm thick
- U-value 1,2 W/m<sup>2</sup>
- sank opener hollow
- no joints on all around seal
- lid both sides white
- strong solid wooden frame 27 mm thick
- Special strong 27 mm steps
- steel safety handrail
- equipped with stair shoes
- complete assembled ready to be build in
- holds weight 150 kg

### Options:

- ISO-upper lid set (plus 87)
- covering boards Minka Fix 27 mm
- hatch safety rail
- Blower-Door-Set

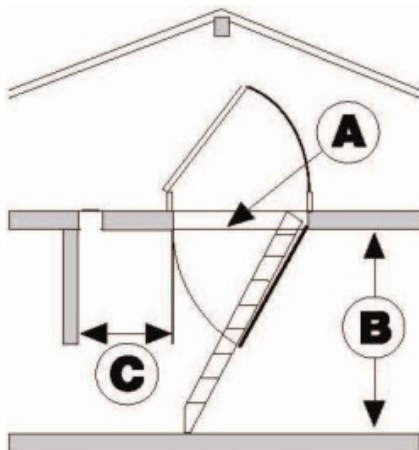

Technical Dimensions				Item No	
A rough opening size	stair frame size	B floor to ceiling height	C landing space	complete	ISO-upper lid set (plus 87)
120/54	119/53/13	-280	55	10340	10704
120/60	119/59/13	-280	55	10343	10713
120/70	119/69/13	-280	55	10344	10714