


Description	Value
<b>General information:</b>	
Product name:	UPS2 25-80 180
Product No:	98707848
EAN number:	5712600251854
<b>Technical:</b>	
Rated flow:	3.81 m <sup>3</sup> /h
Rated head:	6.84 m
Maximum head:	80 dm
TF class:	95
Approvals:	CE, WEEE, UKCA
<b>Materials:</b>	
Pump housing:	Cast iron
Pump housing:	EN 1561 EN-GJL-150
Pump housing:	ASTM A48-25B
Impeller:	Composite
Impeller:	PES 30% GF + PESU-GF20%
<b>Installation:</b>	
Range of ambient temperature:	0 .. 40 °C
Maximum operating pressure:	10 bar
Type of connection:	G
Size of connection:	1 1/2 inch
Pressure rating for connection:	PN 10
Port-to-port length:	180 mm
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	2 .. 95 °C
Selected liquid temperature:	60 °C
Density:	983.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Power input P1:	140 W
Mains frequency:	50 / 60 Hz
Rated voltage:	1 x 230 V
Maximum current consumption:	1.1 A
minimum current consumption:	0.1 A
Enclosure class (IEC 34-5):	X2D
Insulation class (IEC 85):	F
Built-in motor protection:	NONE
Thermal protec:	ELEC
<b>Others:</b>	
Energy (EEI):	0.23
Terminal box position:	9H
Net weight:	2.8 kg
Gross weight:	2.8 kg
Shipping volume:	0.004 m <sup>3</sup>
Sales region:	GB



Pumped liquid = Water  
 Liquid temperature during operation = 60 °C  
 Density = 983.2 kg/m<sup>3</sup>

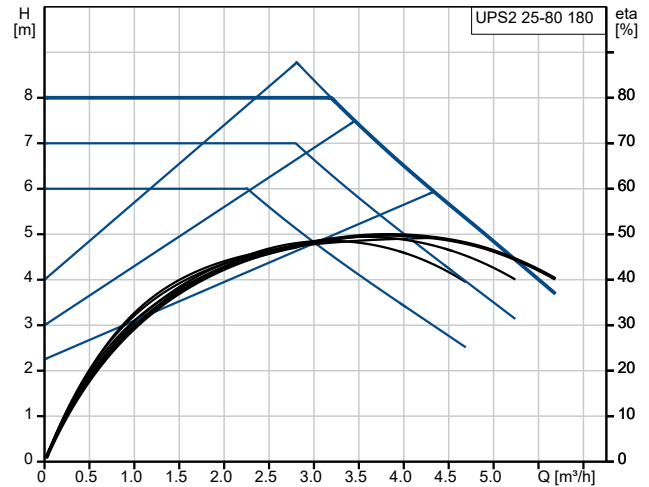