


Description	Value
<b>General information:</b>	
Product name:	STN-3.0 B GBQP
Product No:	98284261
EAN number:	5700311402597
<b>Technical:</b>	
Rated flow:	0.6 m <sup>3</sup> /h
Rated head:	24.4 m
Maximum head:	30 m
Code for shaft seal:	GBQP
Approvals:	CE, WRAS
Approvals for drinking water:	WRAS
Curve tolerance:	ISO9906:2012 3B
Model:	A
<b>Materials:</b>	
Pump housing:	Brass
Impeller:	Brass
Impeller:	CuZn36Pb2As
<b>Installation:</b>	
Range of ambient temperature:	0 .. 40 °C
Maximum operating pressure:	6 bar
Type of inlet connection:	G
Type of outlet connection:	G
Size of inlet connection:	3/4 inch
Size of outlet connection:	3/4 inch
Pressure rating for connection:	PN 6
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	5 .. 60 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Motor type:	INDUCTION
P1 max.:	710 W
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Rated current:	3.1 A
Capacitor size - run:	10 µF/450 V
Enclosure class (IEC 34-5):	X2
Insulation class (IEC 85):	F
Built-in motor protection:	YES
Length of cable:	1.5 m
Type of cable plug:	NO
<b>Controls:</b>	
Flow switch (Yes/No):	Y
Pressure switch Yes/No:	N
<b>Others:</b>	
Net weight:	10.3 kg
Gross weight:	11.8 kg
Shipping volume:	0.035 m <sup>3</sup>



Pumped liquid = Water  
 Liquid temperature during operation = 20 °C  
 Density = 998.2 kg/m<sup>3</sup>

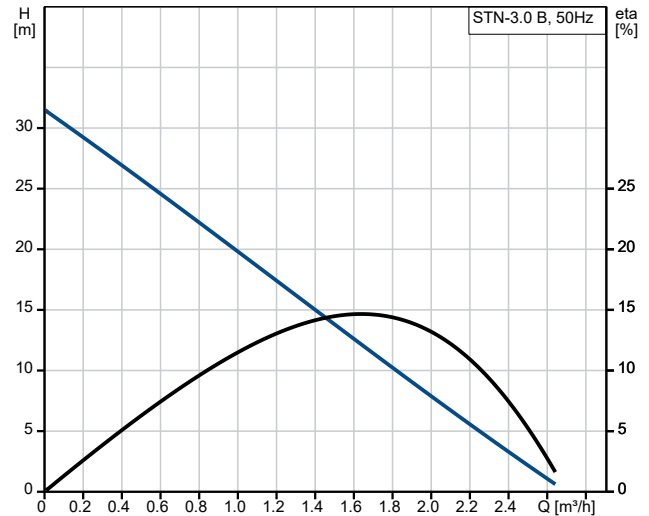