



SCAN HERE

Pedesta

Attractive smooth finish.

The hard-wearing smooth surface of Pedesta creates a vibrant look in a popular rectangular format. Our PrimeTop manufacturing process creates colours which retain their vibrancy for longer than many other options on the market.

- Superb hard-wearing smooth surface
- Vibrant long-lasting colours
- Rectangular profile allows the creation of distinctive patterns
- Creates a stunning, smooth look



200 x 100mm

Sizes



50mm
60mm
80mm

Depths

 PrimeTop®  Ef-Stop®



Smooth

Finish



Permeable

Also available as



Pedestrian Use



Light Traffic



Commercial Traffic

Refer to relevant guidance in BS 7533



BIM Level 2



Pedesta



Specification

 **PrimeTop**  **Ef-Stop**

Product type	Concrete Paving Block
Manufactured to	BS EN 1338:2003
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >350kgs/m ³ cement
Surface Finish	Smooth
Chamfer	Standard
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Strength	Typical tensile splitting strength of >3.6MPa
Slip/Skid risk	Extremely Low
Installed to	BS 7533-3:2005
BS5	Plus Q24 110 Create 45-20-64/400
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm
Abrasion Resistance	Class 3
Durability (Freeze-thaw)	Class 3
External Fire Performance	Deemed to satisfy. See Commission Decision 2000/553/EC
Reaction to fire	Class A1
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 12%
Carbon Footprint	50mm 11.77kgCo ² e/m ² 60mm 14.29kgCo ² e/m ² 80mm 20.22kgCo ² e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breeam rating www.bre.co.uk	50/60mm: A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved by using a recycled sub-base. 80mm: B , in according to the Green Guide to Specification, 4 th Edition 2009. A , can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

Pedesta



Stock

product	size (mm)	colours available	in stock	m ² per pack	m ² per slice	no. per m ²	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
Pedesta 50mm	200 x 100 x 50	Bracken, Brindle, Charcoal, Heather, Natural, Slate	YES	14.40	2.40	50	720	1626	1616
Pedesta 60mm BIM	200 x 100 x 60	Bracken, Brindle, Charcoal, Heather, Natural	YES	13.44	2.24	50	672	1810	1800
Pedesta 80mm	200 x 100 x 80	Bracken, Brindle, Charcoal, Heather, Natural	YES	9.6	1.6	50	480	1724	1714

BIM - This product is available to download from our website in BIM Level 2 format.

Bracken




Heather



Brindle




Slate

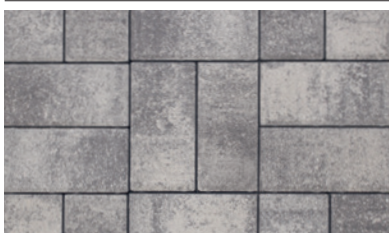

Natural



Charcoal

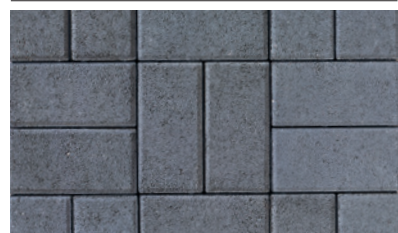

Contact Us

GB: 0844 800 5736
 NI: 028 7964 2411
 ROI: 048 7964 2411

Email

technical@tobermore.co.uk
 sales@tobermore.co.uk

tobermore.co.uk