

# Classica Flags




### Simple & stylish.


Classica Flags have a stylish, simple look. A variety of shades and size options, Classica Flags have the flexibility to blend with contemporary and traditional developments.

- Superb hard-wearing surface
- Vibrant long-lasting colours





600 x 600mm



450 x 450mm



400 x 400mm

Sizes




32mm 35mm

40mm

Depths



### Classica Flags

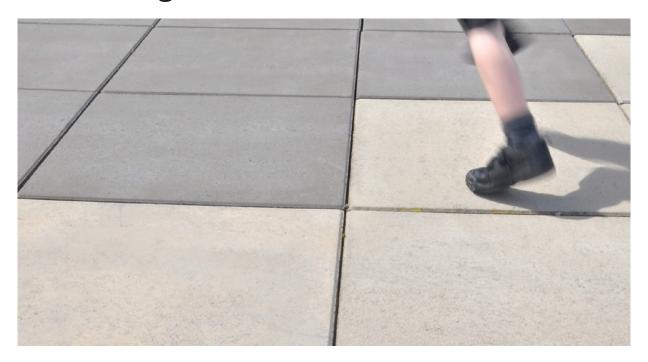

### Specification PrimeTop® Fef-Stop®

Product type	Concrete Paving Flag						
Manufactured to	BS EN 1339:2003						
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >390kgs/m³ cement						
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence						
Strength	Less than 50mm deep Typical tensile splitting strength of >3.5MPa 50mm or greater Typical tensile splitting strength of >5MPa (Class 3)						
Slip/Skid risk	Extremely Low						
Installed to	BS 7533-4:2006						
N55	Plus Q25 315 Create 45-20-64/395						
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm						
Abrasion Resistance	Class 3						
Durability (Freeze-thaw)	Class 3						
External Fire Performance	Deemed to satisfy. See Commission Decision 2000/553/EC						
Reaction to fire	Class A1						
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com						
Energy used	100% renewable energy						
Water used	100% from our rainwater harvesting system and groundwater bore hole						
Recycled content	Not less than 5%						
Carbon Footprint	400x400x32mm 7.88kgCo²e/m² 400x400x40mm 9.63kgCo²e/m² 450x450x35mm 8.76kgCo²e/m² 450x450x50mm 11.87kgCo²e/m² 600x600x40mm 9.80kgCo²e/m² 600x600x50mm 12.46kgCo²e/m²						
Recyclable	100% of this product can be recycled						
Manufacturing & Delivery	From one location within the UK						
breeom rating www.bre.co.uk	<b>A</b> , according to the Green Guide to Specification, 4 <sup>th</sup> Edition 2009. <b>A</b> +, can be achieved by using a recycled sub-base.						
Tobarmara praduata ara manufaaturaa	d is appropriate with an appropriate I (20,000) 2015 Quality Management. Many fact wing facilities are provedited to 100/000 2015						

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.



## Classica Flags



#### Natural



### Charcoal



Buff



### Golden



### **Stock**

product	size (mm)	edge	colours available	in stock	no. per m²	no. per pack	no. per pallet	weight kg per pack GB	weight kg per pack NI/ROI
Classica Flags BIM	600 x 600 x 50	Chamfered	Charcoal, Natural	YES	2.78	20	20	850	841
	600 x 600 x 40	Chamfered	Buff, Charcoal, Natural	YES	2.78	24	24	833	840
	600 x 400 x 40	Chamfered	Charcoal, Natural	YES	4.16	25	100	569	560
	450 x 450 x 50	Chamfered	Buff, Charcoal, Natural	YES	4.94	20	20	1404	1480
	450 x 450 x 35	Chamfered	Buff, Charcoal, Natural	YES	4.94	30	120	517	511
	400 x 400 x 40	Chamfered	Charcoal, Golden, Natural	YES	6.25	25	100	400	400
	400 x 400 x 32	Chamfered	Charcoal, Golden, Natural	YES	6.25	30	120	394	392

 $\textbf{BIM} \cdot \text{This product is available to download from our website in BIM Level 2 format.}$