

Textured Flags



SCAN HERE

Stylish granular surface.

Textured Flags have a modern and natural look that blends beautifully with a variety of other products. Manufactured with a hard-wearing granular surface, these flags are both stylish and hard-wearing.

- Superb hard-wearing textured surface
- Vibrant long-lasting colours
- Natural appearance

 PrimeTop®  Ef-Stop®



T

Textured

Finish



Permeable

Also available as



Pedestrian
Use



Light




Commercial
Traffic




BIM
Level 2


Refer to relevant guidance in BS 7533



600 x 600mm



450 x 450mm



400 x 400mm

Sizes



32mm
35mm
40mm
50mm

Depths



Textured Flags



Specification

 **PrimeTop**  **Ef-Stop**

Product type	Concrete Paving Flag
Manufactured to	BS EN 1339:2003
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >390kgs/m ³ cement
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Strength	Less than 50mm deep Typical tensile splitting strength of >3.5MPa 50mm or greater Typical tensile splitting strength of >5MPa (Class 3)
Slip/Skid risk	Extremely Low
Installed to	BS 7533-4:2006
BS	Plus Q25 315 Create 45-20-64/395
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm
Abrasion Resistance	Class 3
Durability (Freeze-thaw)	Class 3
External Fire Performance	Deemed to satisfy. See Commission Decision 2000/553/EC
Reaction to fire	Class A1
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 5%
Carbon Footprint	400x400x32mm 8.09kgCo ² e/m ² 400x400x40mm 9.06kgCo ² e/m ² 450x450x35mm 8.72kgCo ² e/m ² 450x450x50mm 12.08kgCo ² e/m ² 600x600x40mm 9.96kgCo ² e/m ² 600x600x50mm 12.09kgCo ² e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breem rating www.bre.co.uk	A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

Textured Flags




Stock


product	size (mm)	edge	colours available	in stock	no. per m ²	no. per pack	no. per pallet	weight kg per pack GB	weight kg per pack NI/ROI
Textured Flags BIM	600 x 600 x 50	Chamfered	Buff, Charcoal, Natural	YES	2.78	20	20	850	842
	600 x 600 x 40	Chamfered	Buff, Charcoal, Natural	YES	2.78	24	24	848	840
	600 x 400 x 40	Chamfered	Charcoal, Natural	YES	4.16	25	100	569	560
	450 x 450 x 50	Chamfered	Buff, Charcoal, Natural	YES	4.94	20	20	1490	1480
	450 x 450 x 35	Chamfered	Buff, Charcoal, Natural	YES	4.94	30	120	521	517
	400 x 400 x 40	Chamfered	Charcoal, Golden, Natural	YES	6.25	25	100	403	400
	400 x 400 x 32	Chamfered	Charcoal, Golden, Natural	YES	6.25	30	120	387	385

BIM - This product is available to download from our website in BIM Level 2 format.


Natural

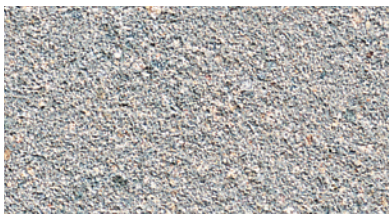

Charcoal

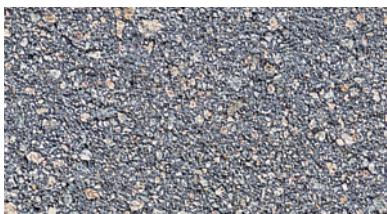

Buff

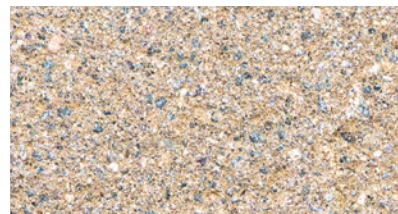

Golden



Contact Us

GB: 0844 800 5736
 NI: 028 7964 2411
 ROI: 048 7964 2411

Email

technical@tobermore.co.uk
 sales@tobermore.co.uk