

Beaufort Flags



SCAN HERE

Natural contoured appearance.


Beaufort Flags are inspired by the timeless appeal of natural stone. Manufactured with a contoured surface, lightly embossed and finished with a subtle sparkle, Beaufort Flags are available in natural, muted colours.

- Superb hard-wearing surface
- Natural, muted colour range
- Resembles the aesthetics of natural stone
- Contemporary appearance


 PrimeTop®  Ef-Stop®

C
Contoured
Finish


Pedestrian
Use
Refer to relevant guidance in BS7533

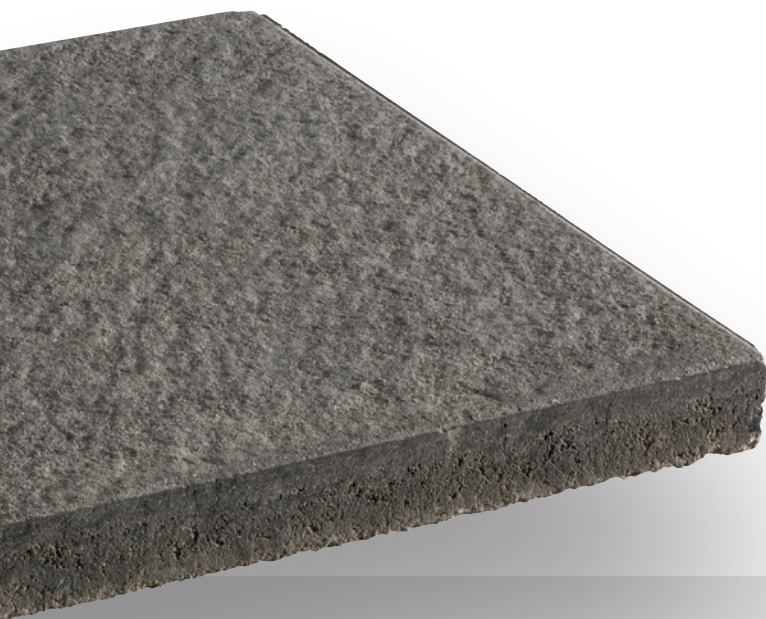

600 x 400mm



450 x 450mm



400 x 400mm

Sizes



40mm
35mm

Depths

Beaufort Flags



Specification

PrimeTop® Ef-Stop®

Product type	Concrete Paving Flag
Manufactured to	BS EN 1339:2003
Granite Content	Not less than 60% of granite aggregate in surface layer for Charcoal; Not less than 73% of granite aggregate in surface layer for Natural; Not less than 44% of granite aggregate in surface layer for Buff.
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >390kgs/m ³ cement
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Strength	Typical tensile strength of > 3.5MPa
Slip/Skid risk	Extremely Low
Installed to	BS 7533-4:2006
NS	Plus Q25 315 Create 45-20-64/395
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm
Abrasion Resistance	Class 3
Durability (Freeze-thaw)	Class 3
External Fire Performance	Deemed to satisfy, See Commission Decision 2000/553/EC
Reaction to fire	Class A1
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 5%
Carbon Footprint	10.27kgCo ² e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breem rating www.bre.co.uk	A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Stock

product	size (mm)	edge	colours available	in stock	no. per m ²	no. per pack	no. per pallet	weight kg per pack GB	weight kg per pack NI/ROI
Beaufort Flags	400 x 400 x 40	Chamfered	Buff, Charcoal, Natural	YES	6.25	25	100	403	400
	450 x 450 x 35	Chamfered	Buff, Charcoal, Natural	YES	4.94	30	120	515	511
	600 x 400 x 40	Chamfered	Charcoal, Natural	YES	4.16	25	100	569	560


Natural



Charcoal



Buff

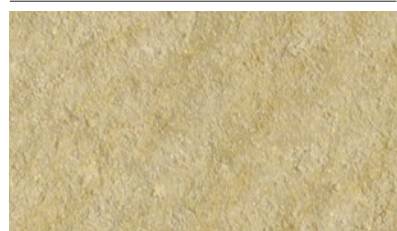

Contact Us

GB: 0844 800 5736
 NI: 028 7964 2411
 ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk