

Multiboost Simplicity Rectangular: 345L

The Multiboost Simplicity Rectangular 345L is an ideal solution for houses and apartments with low mains water pressure and where pressure fluctuates. The Multiboost Rectangular range is perfect for areas where height restrictions and access are an issue. It is electronically controlled through a flow switch unit which starts and stops the pump automatically when the tap is opened and closed.


Key Features

- › Non-corrosive holding tank (WRAS approved material)
- › Manual adjustable start-up pressure function
- › Dry run protection with auto restart (time delay)
- › 16 amp rated controller with pressure gauge as standard
- › 3 piece union on outlet (for easy maintenance for crimp piping)
- › Overflow included as standard





Range Option

Product Code	Model
1081647	345L Fixed Speed (Presflo)

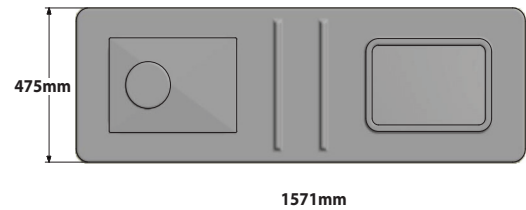

System Connections

Connection	Size
Inlet*	½" BSP
Outlet	1" BSP
Overflow	1" BSP
Drain Off	1" BSP

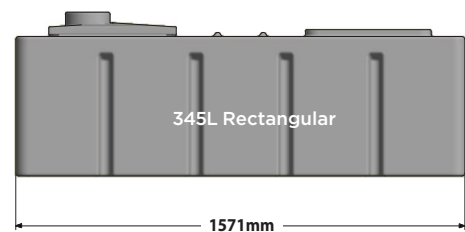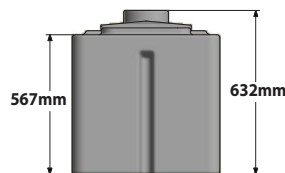

*Bypass unit recommended to be fitted on inlet supply
Available Drip Tray is recommended to be used on installation

	Fixed Speed Option
Power supply	240 volt, 50Hz
Pump	Pedrollo Top Multi 2 (240 volt)
Controller	Presflo (16amp)
Current Input	3.4 amp
Mains Power Cable	5mtr x 1.5mm ² 3 core
Pump dB Rating (approx.)	<65dB
Tank Weight Empty	34kg
Tank Weight Full	1L of water = 1 kg plus weight of empty tank
Access Cover Ø	Removable Lid

Some key features



Pump Type	Power		Q l/min	0	10	20	30	40	50	60	70	80
	kW	HP										
Top Multi 2	0.55	0.75	H Metres	42	40	38	34	30	24	18	11.5	5